

DBV-30



DBV-40



DBV-30/40

DYNAMIC BALANCE VALVE



DBV-30/40 DYNAMIC BALANCE VALVES

DBV-30 SELECTION TABLE



DBV-30		
Dia	Min. Max. Flow Rate (m ³ /h)	Min. Max. Flow Rate (lt/min)
1/2"	0,09 - 0,60	1,50 - 10,00
3/4"	0,09 - 0,60	1,50 - 10,00
1"	0,09 - 0,60	1,50 - 10,00
1 1/4"	0,30 - 2,40	5,00 - 40,00
1 1/2"	0,60 - 3,60	10,00 - 60,00
2"	0,60 - 7,20	10,00 - 120,00

DBV-40 SELECTION TABLE



DBV-40		
Dia	Min. Max. Flow Rate (m ³ /h)	Min. Max. Flow Rate (lt/min)
65	5,00 - 27,00	83,00 - 450,00
80	5,00 - 27,00	83,00 - 450,00
100	10,00 - 54,00	167,00 - 900,00
125	15,00 - 81,00	250,00 - 1.350,00
150	20,00 - 108,00	333,00 - 1.800,00
200	35,00 - 189,00	584,00 - 3.150,00
250	60,00 - 324,00	1.000,00 - 5.400,00
300	75,00 - 405,00	1.250,00 - 6.750,00

DBV-40 DYNAMIC BALANCE VALVES

Cona DBV-40 is designed especially for the applications of heating cooling system, industrial installations, building mechanic installations and enable to fix the flow of air conditioning system.

It provides the selected flow on the line automatically by way of cartridge. Cona DBV-40 provides to remain the selected flow in stable level in system even under 40 pressure fluctuation.

FEATURES

- Stainless steel cartridges with adjusted flow
- Required flow value is provided automatically in system
- There is n required lenght for pipe before and after DBV-40
- There is n no need any consumption for system adjustment
- DBV-40 balance bvalves is produced from DN65 to DN250



Valve Body	: St.37
O-Ring	: EPDM
Pressure Rate	: PN 16 Strainer is recommended
Temperature	: -20 / +120 °C
Different. Pres. Valve	: 12 -600 kPa
Flow Interval	: 6,47 -3,94 m ³
Clamping Ring	: Stainless Steel 306

Selection:

For the selection of Cona DBV-40 balance valve;


1. Flow amount
2. Pipe diameter
3. Differential Pressure required to be known

It needs to determine if the system has stable flow or changeable flow, while making the selection of flow interval. Hereby, changeable flow system, pumps with inverter controlled or the system that feeds with proportional controlled valve.

DBV-30/40 DYNAMIC BALANCE VALVES

WORKING PRINCIPLE

It is used stainless steel cartridges which its liquid flow calibrates to obtain required design flow for Cona DBV-40 balance valve. It is formed only one movable piece that absorbs sudden flow changes automatically. Passed flow amount on the line be held on required flow rate by way of this cartridge. Orifice of cartridge is designed to obtain required flow and spring of cartridge is calibrated. In each cartridge's working interval works to providing 5%± sensibility. During its working, the cartridge that adjust flow value hold the orifice area on required breaks that needs to be. It works on pressure differential between 34-600 kPa to provide accurate flow. Using more than one cartridge provides to obtain the required flow value, for the flow which has more flow gauge than obtained from one cartridge for high used flow valves. Sum of the flow that pass in cartridges is equal to flow amount that pass on valve.

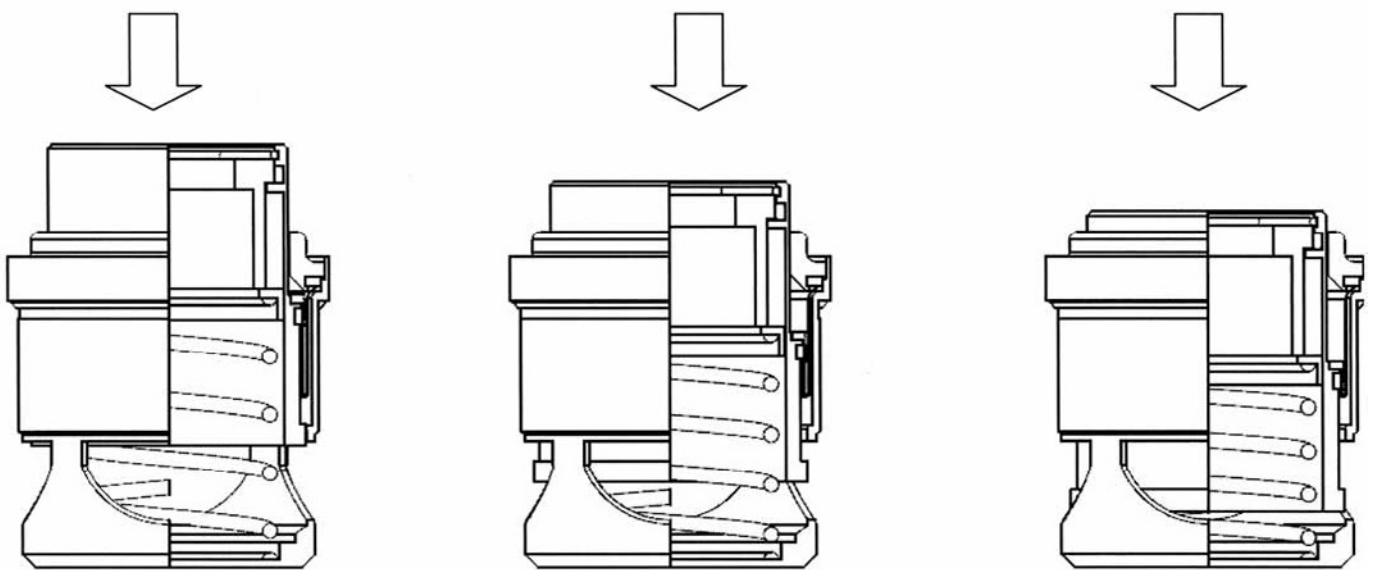

It works as a stable orifice valve, under the value of cartridge differential pressure.

If cartridge is on determined differential pressure interval. Transit area is adjusted as proportional to enable to design flow.

Cartridge again become its stable orifice way, when pressure differential value reach over the cartridge's differential pressure value.

DBV-40 DYNAMIC BALANCE VALVES

Flow m ³ /H	Flow L/H	Flow L/D	Flow L/S	Min Δp	KV
6,18	6181	103,01	1,717	0,34	10,6
6,36	6356	105,93	1,765	0,34	10,9
6,53	6531	108,84	1,814	0,34	11,2
6,82	6822	113,70	1,895	0,34	11,7
7,11	7114	118,56	1,976	0,34	12,2
7,23	7230	120,51	2,008	0,34	12,4
7,94	7944	132,40	2,207	0,36	13,2
8,61	8613	143,55	2,393	0,37	14,2
9,76	9765	162,75	2,712	0,41	15,3
10,63	10629	177,15	2,953	0,41	16,6
11,14	11141	185,69	3,095	0,41	17,4
12,10	12102	201,70	3,362	0,41	18,9
13,47	13465	224,42	3,74	0,44	20,3
15,29	15288	254,80	4,247	0,47	22,3
17,33	17327	288,78	4,813	0,53	23,8
18,24	18240	304,01	5,067	0,57	24,2
21,85	21845	364,09	6,068	0,7	26,1
22,92	22924	382,07	6,368	0,7	27,4
24,51	24509	408,48	6,808	0,75	28,3
25,72	25721	428,68	7,145	0,75	29,7

Flow calculating for cartridges (It is valid under Min Δp)

$$Q = kV \times \sqrt{\Delta p}$$

Q = Flow (m³/h)


kV = Opening valve rate

Δp = Differential Pressure



Cona DBV-40 Cartridges work as set values. Not influenced from any pressure fluctuation. Flow is held stable in differential pressure changes.

CARTRIDGES TECHNICAL SPECIFICATION

Cartridge Body	: AISI304
O-Ring	: EPDM
Pressure Rate	: PN16
Temperature	: -20 / +120 °C
Diff. Pres. Changes	: 34 -600 kPa
Flow Rate	: 6,18 - 25.72 m ³
Diaphragm	: HNBR

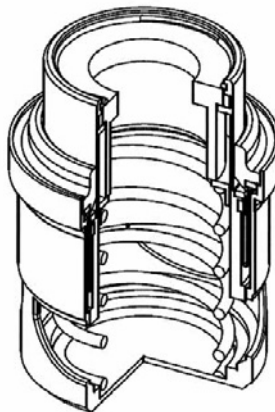

DBV-30 DYNAMIC BALANCE VALVES

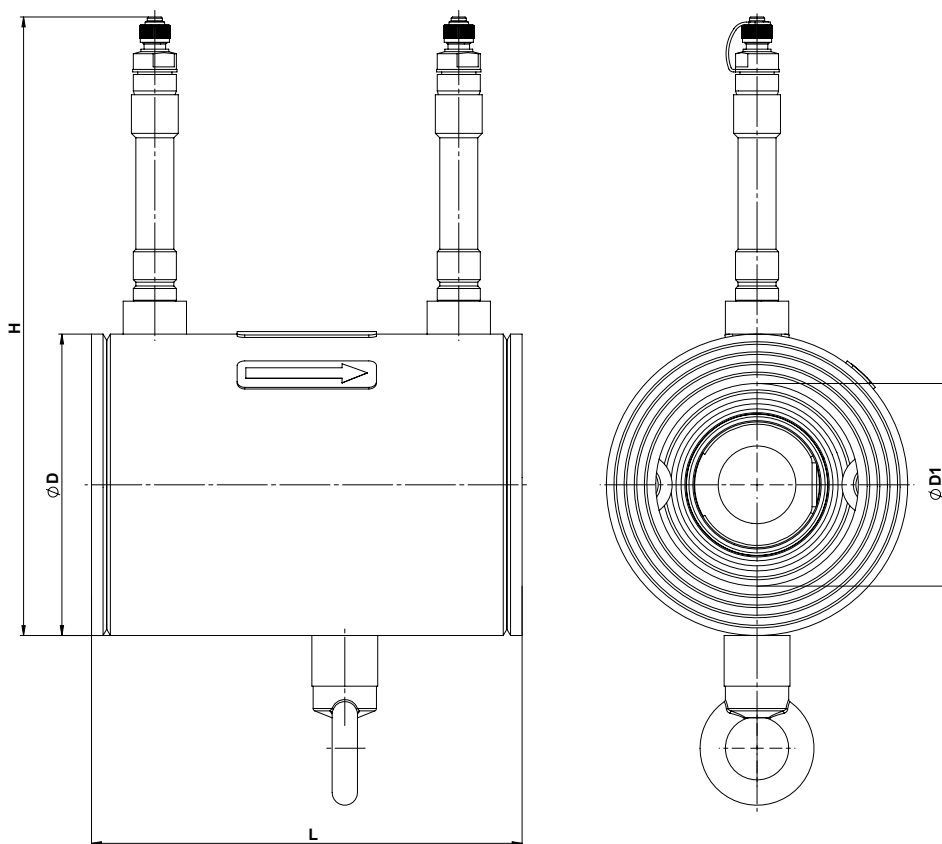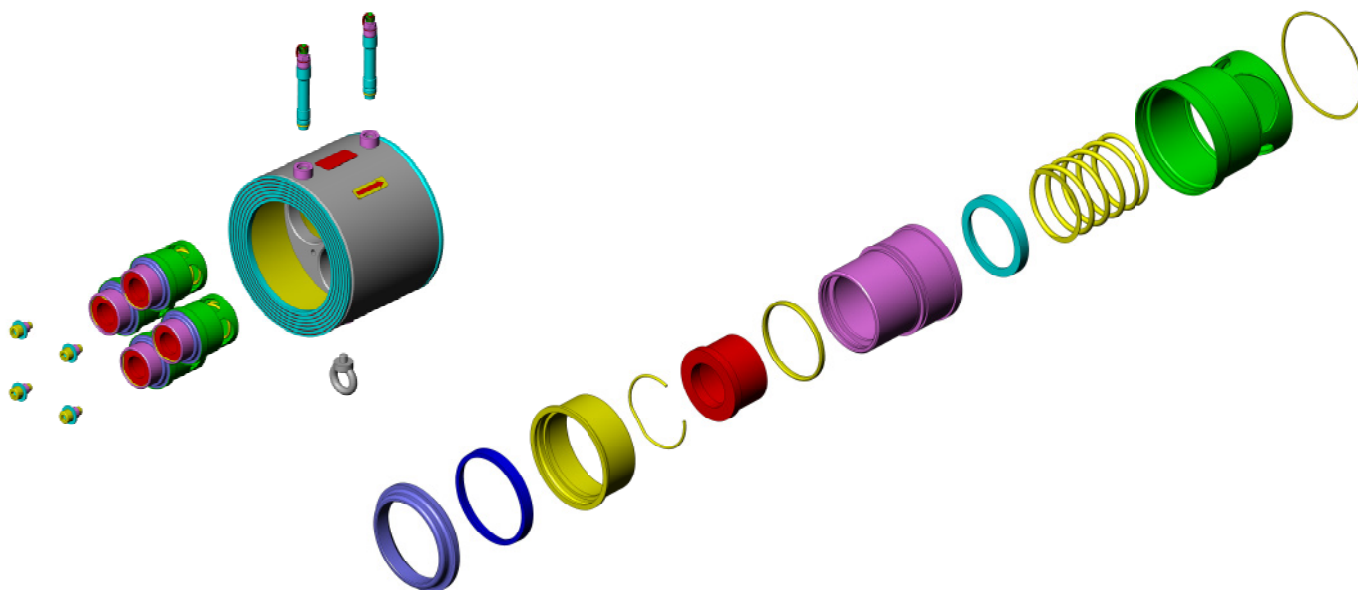

DN	L	ØD	ØD1	H
DN65	170	119	80	244
DN80	170	131	80	256
DN100	170	163	100	288
DN125	170	193	125	318
DN150	170	216	150	341
DN200	170	271	200	396
DN250	170	326	650	451

DBV-30 DYNAMIC BALANCE VALVES

AUTOMATIC FLOW CONTROL VALVE




Diameter	: 1/2" - 2"
Fluid	: Cold Water/Hot Water
Working Pressure Range	: 0,5 - 3
Max. Working Temp.	: 120 °C
Mounting	: Threaded
Body	: Brass
Disc	: Stainless Steel
Diaphragm	: EPDM

Automatic control valves, stabilize automatically the required in used systems. Provides automatic flow by keeping the pressure that formed on going and returning lines in unsteady systems. Having simple working and its structure these valves bring huge facilities to system. Provides a balanced flow by way of its diaphragm and control spring. Bringing some easiness to systems such as required pressure set adjustments with detecting the difference pressures, enabling to tolerate disadvantages of particle, residue etc. That originated in system made them to be preferable and moreover detecting the pressure difference that originated in additions and removals at system, automatic adaptation to system without any extra adjument is the most preferable reason of it.

ADVANTAGES OF CONA DYNAMIC BALANCE VALVES

- CONA DYNAMIC VALVES WORK ACCORDING TO AUTOMATIC BALANCED BASE.
- SPRING TYPE BALANCE VALVES AUTOMATICALLY CONTROL THE FLOW AND PRESSURE.
- MINIMIZE THE FLOW ERROR MARGIN BY WAY OF HAVING STRUCTURE OF ITS DIAPGRAM AND PRESSURE CONTROL SPRING AS COMPARED WITH STANDART CARTRIDGE TYPE BALANCE VALVES.
- FLOWCHANGES SET CAN BE ADE EASILY.
- DUE TO APPLIABLE DESING , SOUND AND VIBRATION ABSORPTIONS IN HIGH.
- SINCE THERE IS A CONSTANT FLOW IN SYSTEM, RESIDUE AND DIRTINESS.
- FORMATION IS VERY LOW. EASILY DISMANTLING TO BE CLEANED.


DBV-30 DYNAMIC BALANCE VALVES

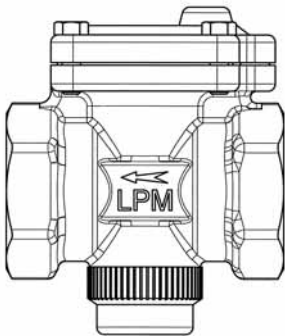




Diameter	L(mm)	H1(mm)	H2(mm)	Weight(kg)
1/2"	95	39	49	0,64
3/4"	95	39	49	0,64
1"	100	39	49	0,79
1 1/4"	114	45	60	1,40
1 1/2"	132	55	69	2,25
2"	165	60	83	3,9

Product	ΔP (Pressure Difference)	Diameter	Flow
DBV-30	0,5 - 3	1/2"	1,5-10
		3/4"	1,5-10
		1"	1,5-10
		1 1/4"	5-40
		1 1/2"	10-60
		2"	10-80

TABLE OF FLOW SET INTERVAL
GRAPHIC ACCORDING TO DIFFERENTIAL PRESSURE FLOW CHANGES

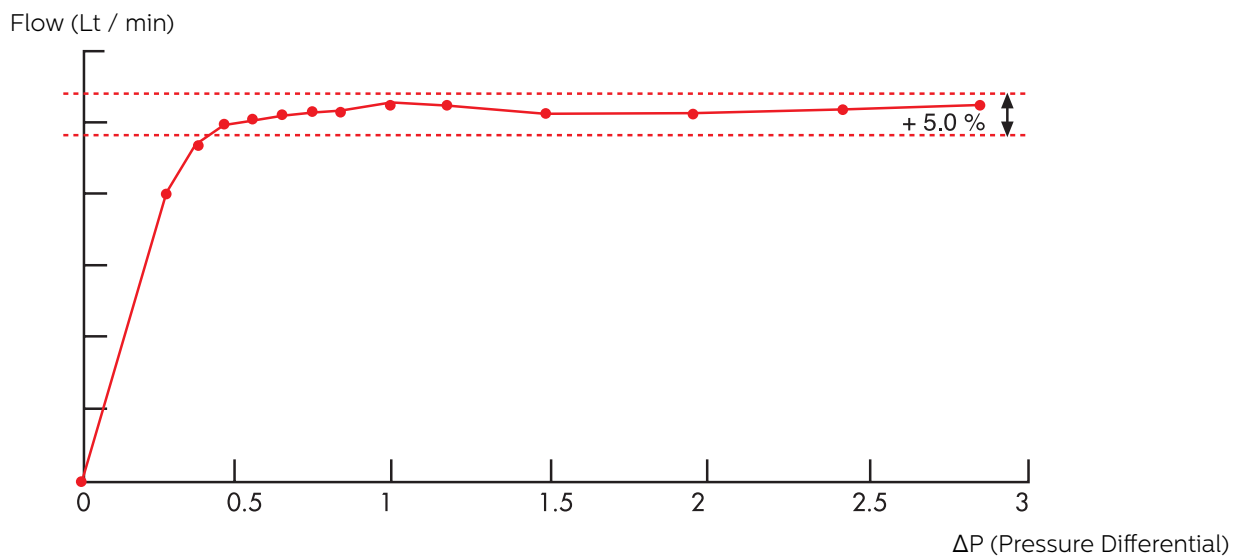

DBV-30 DYNAMIC BALANCE VALVES

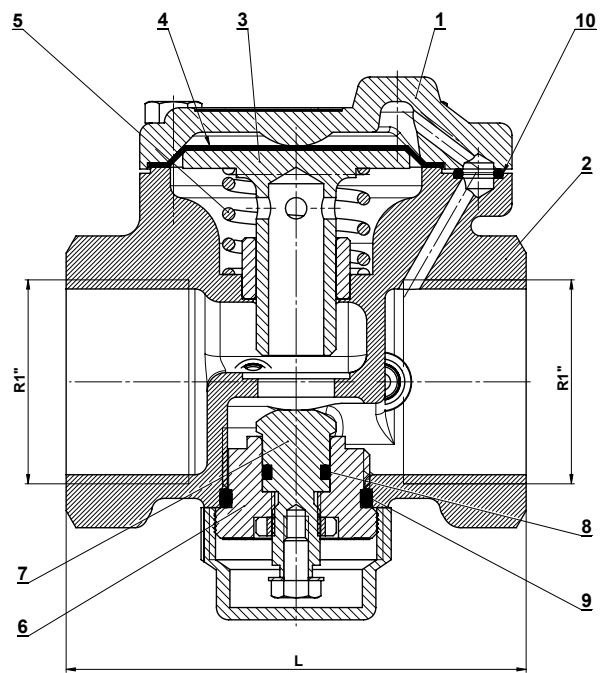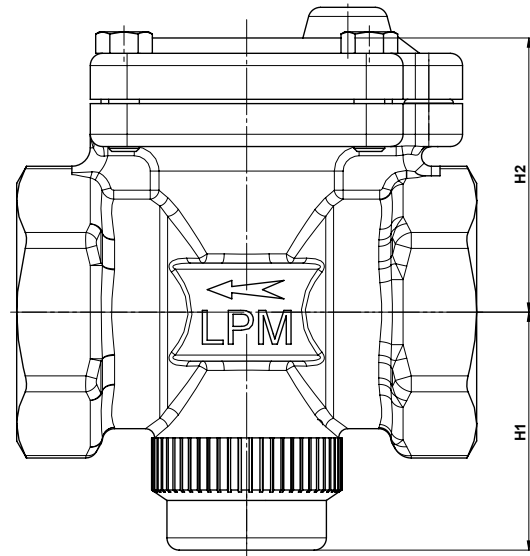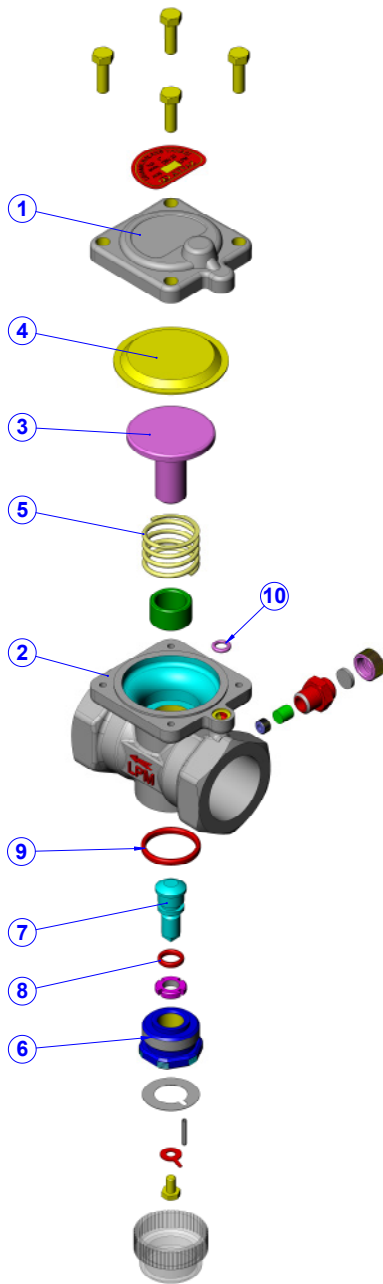

A-A


No	Part Name	Material
1	Cover	Ms 58
2	Body	Ms 58
3	Flow Control Stem	Ms 58
4	Diaphragm	EPDM
5	Flow Adj. Spring	AISI 302
6	Flow Adj. Stem Bearing	Ms 58
7	Flow Adj. Stem	Ms 58
8	Flow Adj. Stem O-ring	EPDM
9	Seat O-ring	EPDM
10	Cover O-ring	EPDM

Dia	H1	H2	L
1/2"	39	42,5	71
3/4"	39	42	71
1"	40	45	75
1 1/4"	45	52	84
1 1/2"	55	62	100
2"	59	76	126

DBV-30 DYNAMIC BALANCE VALVES

BODY LEVER

- Provides continual surface stickness applying to cleaning operations at certain intervals.

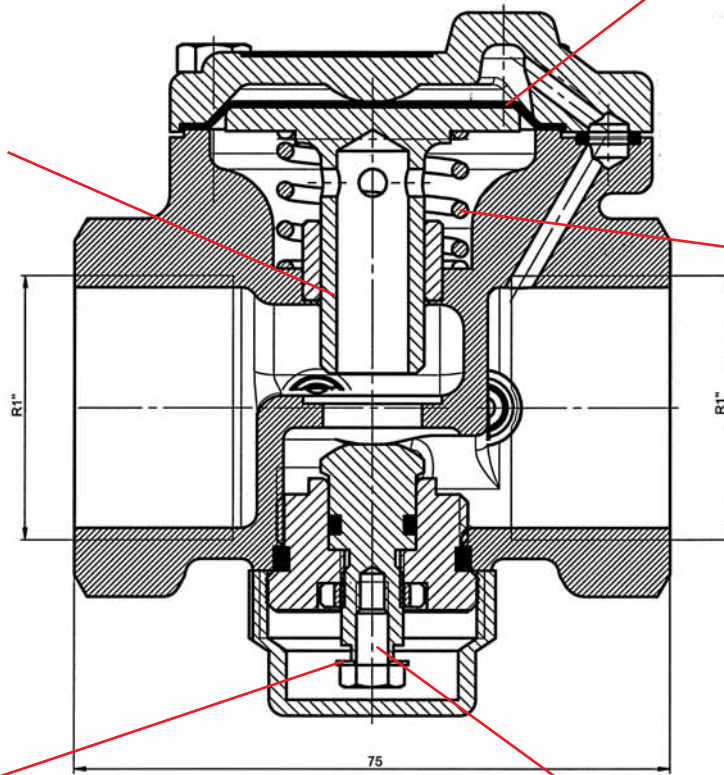

DIAPHRAGM

- Error margin is minimum at diaphragm type
- High endurance

PRESSURE FLOW SET SPRING

TEST PLUG

- Used to measure pressure and flow amount while system working.

FLOW SET WASHER

- Flow set rate changes is made.

BOLT

STABILIZER



- Balanced the sensitive flow which is made at high speed flow.

A-A



DBV-30 DYNAMIC BALANCE VALVES

SYSTEM PRESSURE > WORKING PRESSURE

If the system pressure lower than the working pressure (under 0,3 kgf/cm²), flow speed shows increasing until comes the working pressure limit because of, there is not efficient pressure enable to work valve.

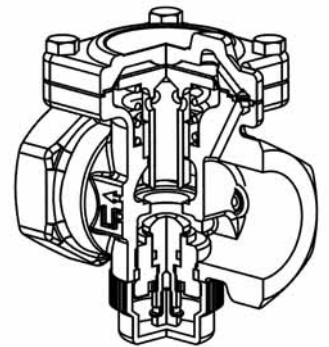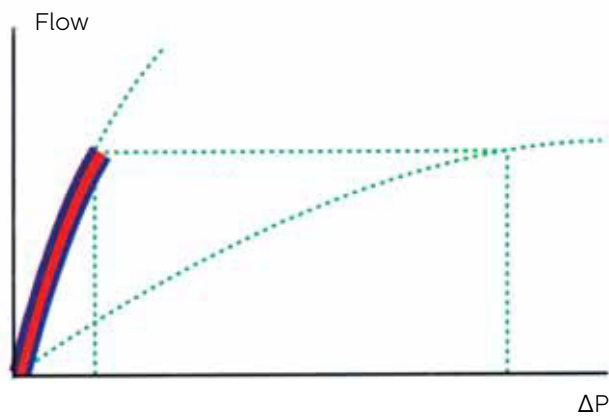



If the system pressure equal to working pressure (0,3-5,0kgf/cm²), Flow speed is fixed by diaphragm which affect to pressure difference and pressure control spring.

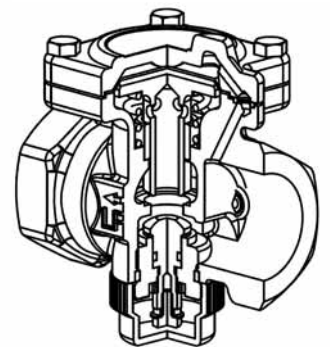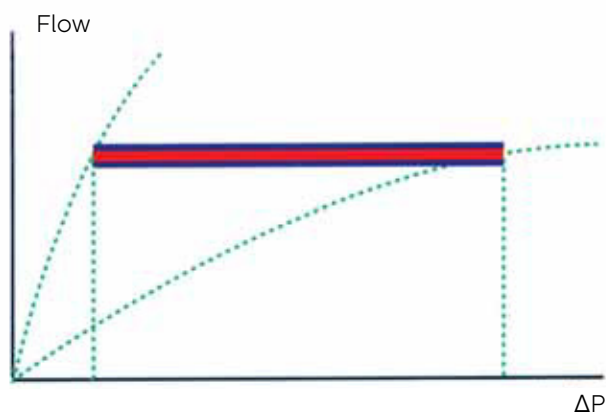

DBV-30 DYNAMIC BALANCE VALVES

SYSTEM PRESSURE > WORKING PRESSURE

When system pressure is higher than working pressure, flow pressure that applied to diaphragm would increase. Therefore, pressure control valve will close and flow amount pass on the systems would decrease.

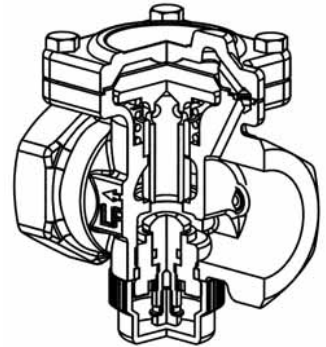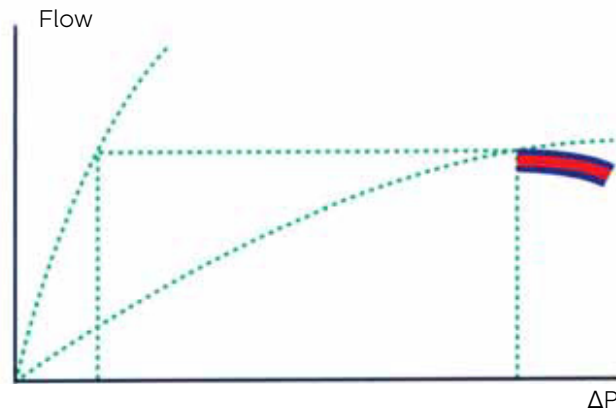

FIXING THE FLOW SET


Needs to adjust the indicator where below valve with special key in order to change flow set.




DBV-30 DYNAMIC BALANCE VALVES

APPLICATIONS


DYNAMIC BALANCE VALVE APPLICATIONS AT HOUSES

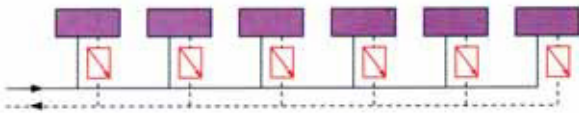


APPLICATIONS AT PIPE COLUMN LINE

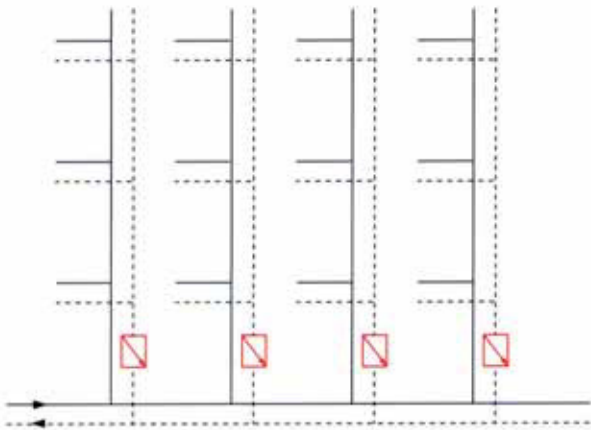


TEMPERATURE CONTROL SYSTEMS

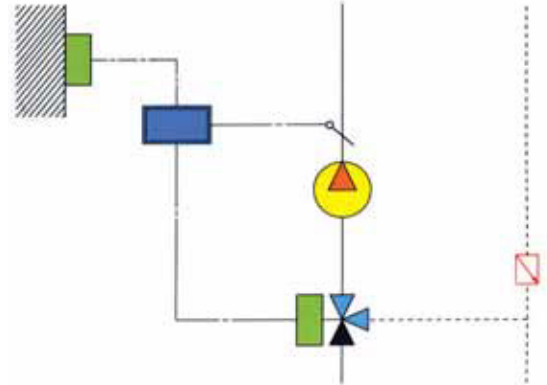


TEMPERATURE CONTROL SYSTEMS

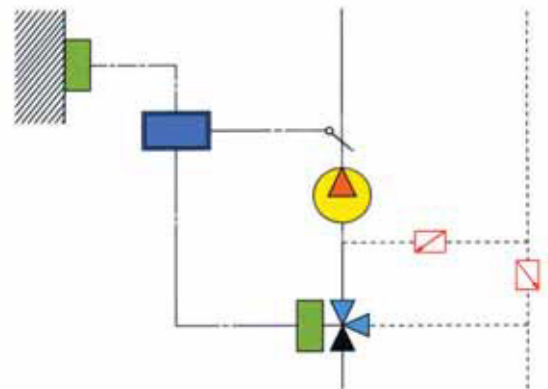

WITH 3 WAY VALVE APPLICATIONS

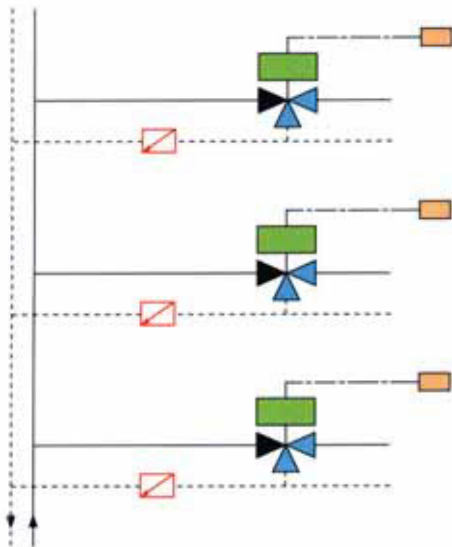


PRESSURE CONTROL SYSTEMS

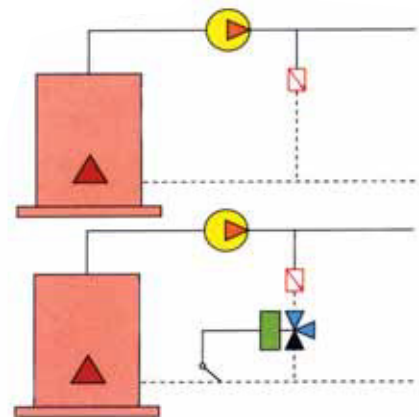


DBV-30 DYNAMIC BALANCE VALVES

APPLICATIONS


WITH 3 WAY VALVE CONTROL
PIPE APPLICATIONS

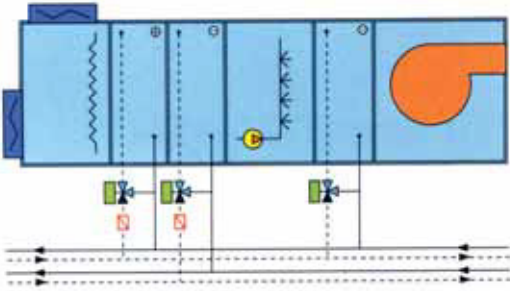


LOCALIZING SYSTEM

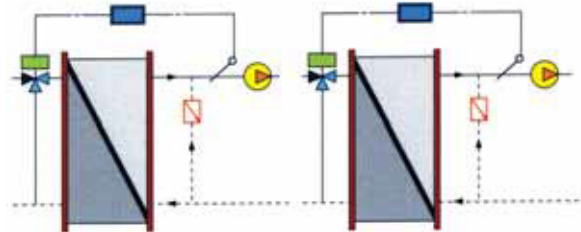


COOLING TOWER

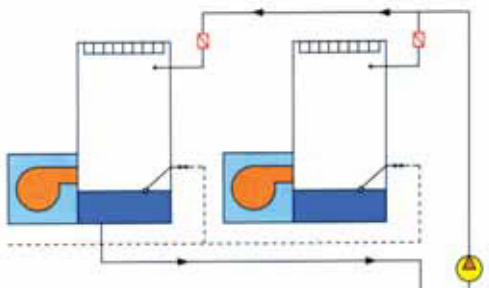


WATER SYSTEM

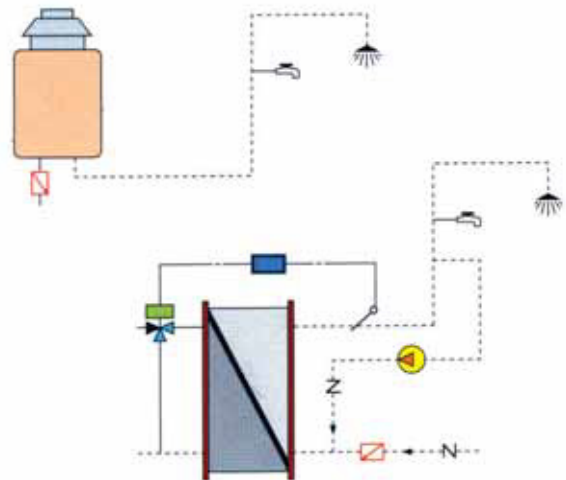


COLD WATER SYSTEM

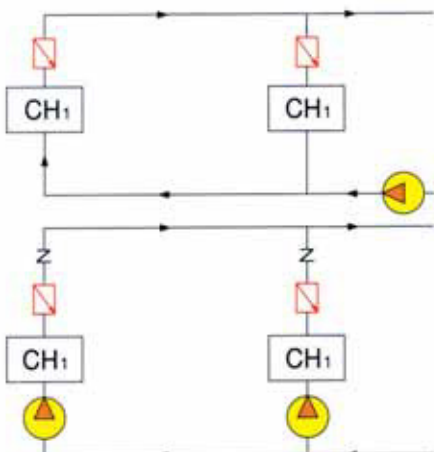


FLOW DELIVERY SYSTEM

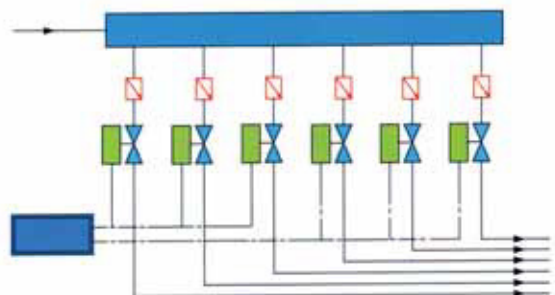


DBV-30 DYNAMIC BALANCE VALVES

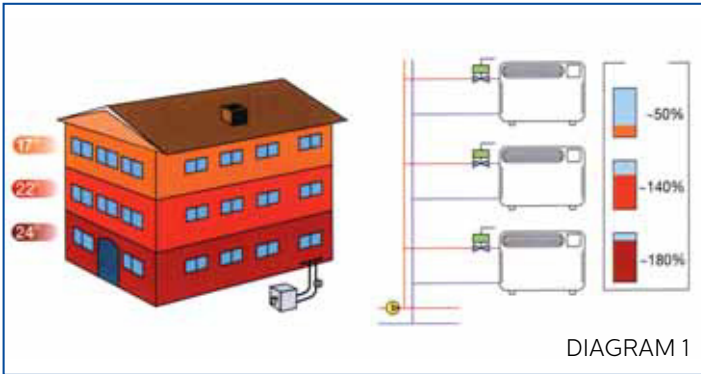

BECAUSE OF NOT ENABLING TO BALANCE IN SYSTEM WHICH AUTOMATIC PRESSURE BALANCER FLOW VALVE IS NOT USED, FLOW SPEED CAN NOT BE CONTROLLED AND THIS CAUSE DIFFERENT TEMPERATURE LOSSES AT DIFFERENT POINTS AS CAN BE SEEN AT DIAGRAM 1, FLOW DIFFERENCE IS VERY HIGH.

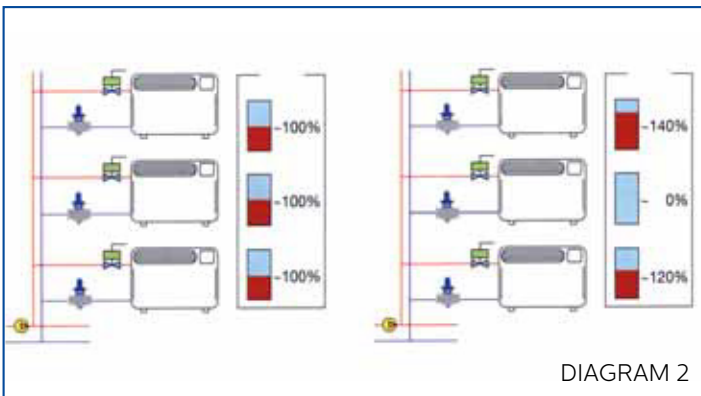

IN CASE THERE IS A CLOSED POSITION POINT IN SYSTEMS WHICH STATIC BALANCE VALVE IS USED CAUSE NOT TO ENABLE BALANCE AND FLOW DIFFERENCES CAN NOT BE FORMED. THEREFORE, NOT ENABLING TO CONTROL FLOW DIFFERENCE, CAUSE DIFFERENT FLOW SPEED AT DIFFERENT POINT AND HEREBY CAUSE DIFFERENT FLOW PROPORTION AT DIFFERENT POINTS. AS YOU CAN SEE DIAGRAM 2; ALTHOUGH THERE IS NOT ANY FORMATION OF FLOW DIFFERENCE, FLOW DIFFERENCE CAN BE OBSERVED.

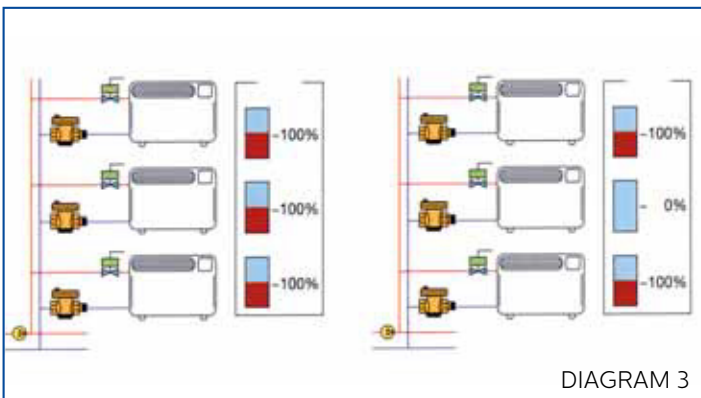

STABLE FLOW SPEED IS PROVIDED BECAUSE OF CONTROLLING PRESSURE IN SYSTEMS WHICH AUTOMATIC BALANCE VALVE (CONA DIAPHRAGM TYPE BALANCE VALVE) IS USED. EVEN BALANCING IS CUT AT ANY POINT, FLOW DIFFERENCE CAN NOT BE SEEN. THE SYSTEM, THAT AUTOMATIC VALVE IS USED, CAN BE OBSERVED AT.