

SK-51

FLOAT TYPE STEAM TRAP


GENERAL FEATURES

Crima Steam Line SK-51 float steam traps especially perform continual evacuation at the steam saturation temperature. Crima Steam Line SK-51 doesn't affect instantaneous and large pressure shift. SK-51 is mainly applied at the systems where the condensate is evacuated rapidly and it is also ideal for automatic temperature control system.

Installation:

SK-51 can be used vertically as the inlet to stay up the top and the outlet to remain at the bottom. It can also be installed horizontally from right to the left or opposite way. If it is not indicated differently in the order sheet, it will be assumed as right to the left. Will be assumed as right to the left. Cover part can be arranged according to horizontal or vertical installation type.

(1/2" - 3/4" - 1")

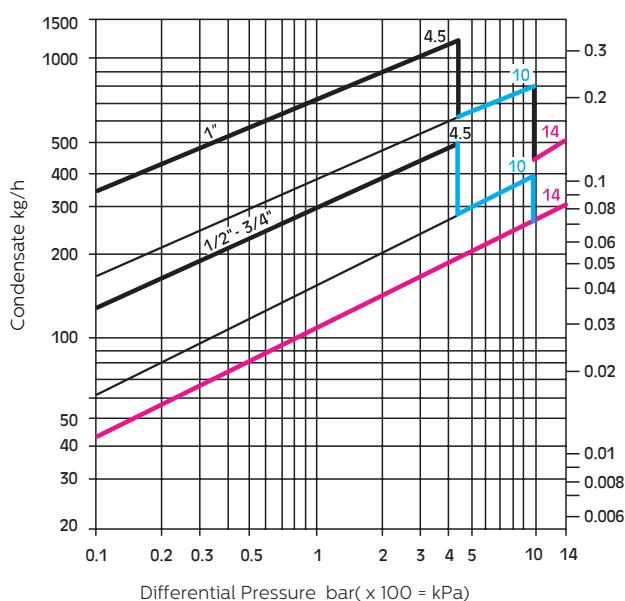

Discharge Chart:

Red Chart : $\Delta p = 14$ bar
Blue Chart : $\Delta p = 10$ bar
Black Chart : $\Delta p = 4.5$ bar

Product Features:

Body: Ductile Iron GGG 40.3
Cover: Ductile Iron GGG 40.3
Internals and Float: Stainless Steel
Connection: Flanged and Threaded


OPERATING CONDITIONS	
Max. Operating Pressure	16 bar
Max. Differential Pressure (ΔP)	4.5-10-14 bar
Max. Operating Temperature	250 °C







* Please ask to our sales team for different pressures and diameters.

SK-51 FLOAT TYPE STEAM TRAP

CONSTRUCTION

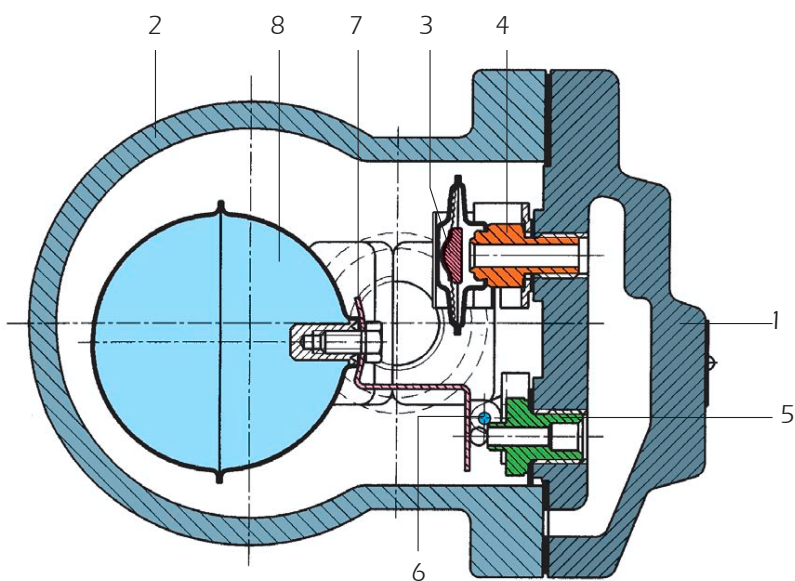

PART LIST		
NO	PART NAME	MATERIAL
1	Cover	Ductile Iron GGG 40.3
2	Body	Ductile Iron GGG 40.3
3	Thermostatic Capsule	Stainless Steel
4	Air Drain Unit	Stainless Steel
5	Condensate Drainer	Stainless Steel
6	Orrifice	Stainless Steel
7	Float Lever	Stainless Steel
8	Float	Stainless Steel

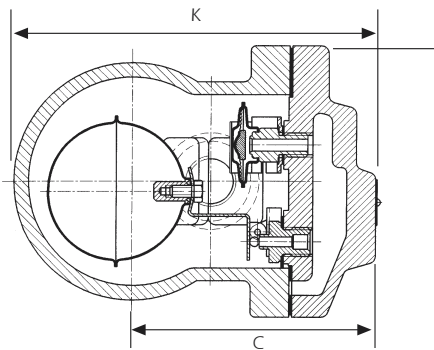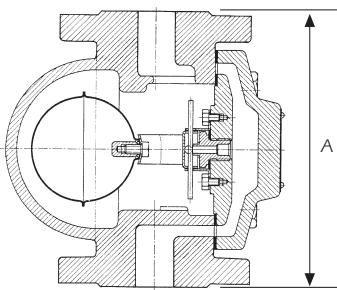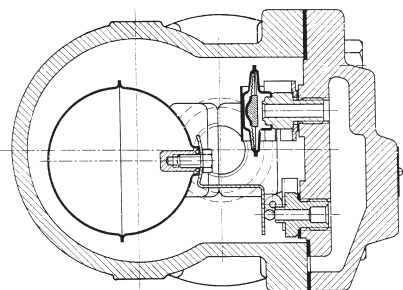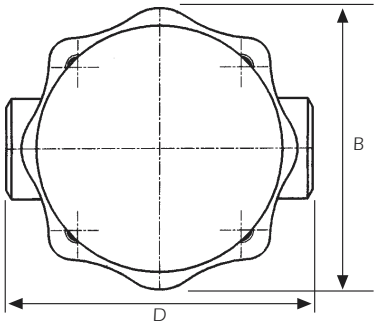


DIMENSIONS						
SIZE	ARTICLE NO	FLANGED				
		A (mm)	K (mm)	B (mm)	C(mm)	D (mm)
DN 15	703200102000	150	150	108	68	122
DN 20	703200102003	150	150	108	68	122
DN 25	703200102010	160	167	108	107	145

SK-51 FLOAT TYPE STEAM TRAP

INSTALLATION

3D INSTALLATION SAMPLE

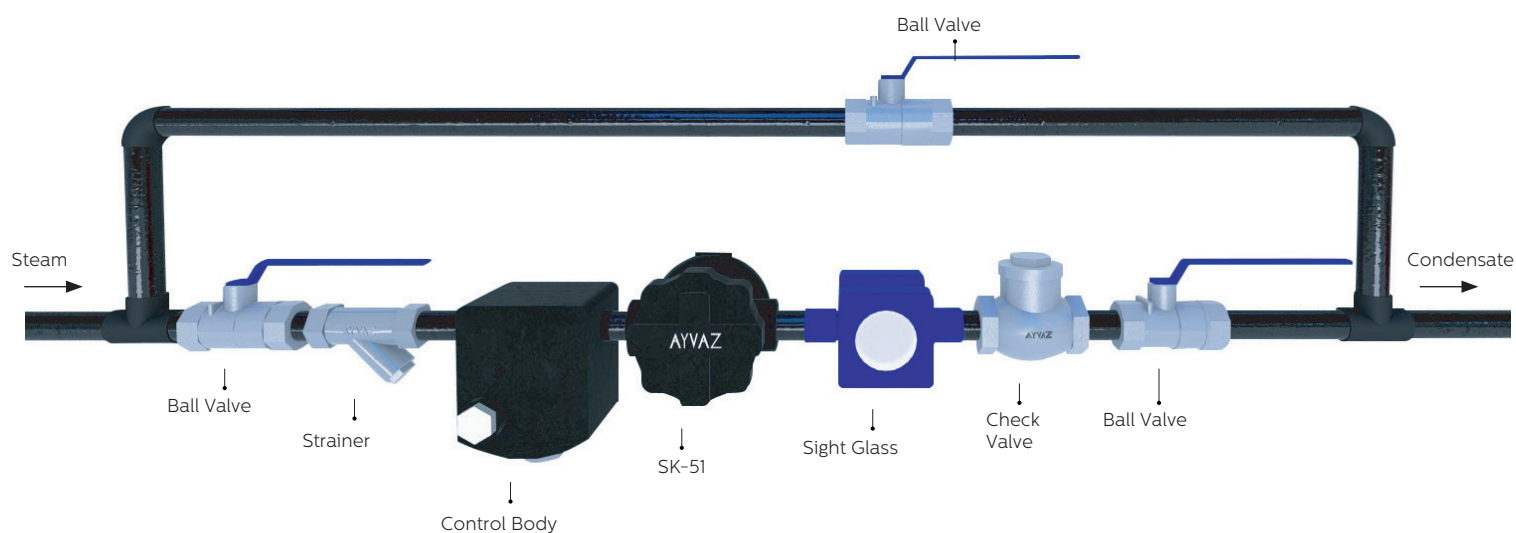

2018 - Non contractual document - Reproduction forbidden without prior authorization